



IMMERSION TYPE POLYMER HEAT EXCHANGER

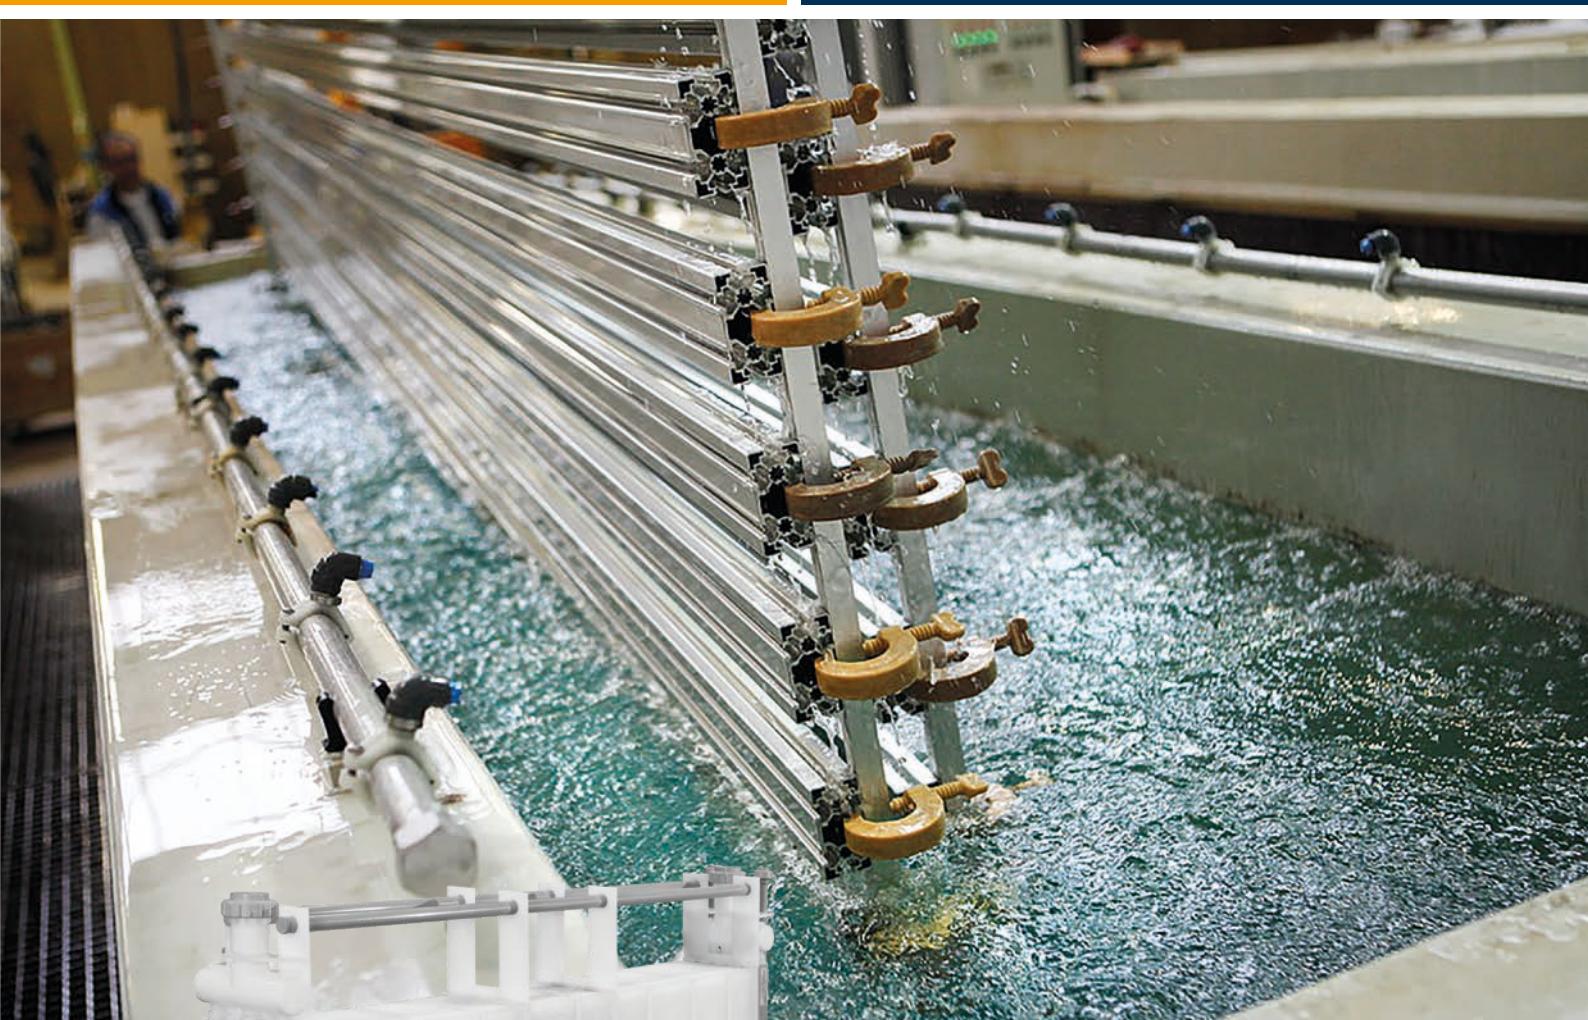


- where outstanding corrosion resistance matters
- where reliability matters
- where efficiency matters

APPLICATIONS

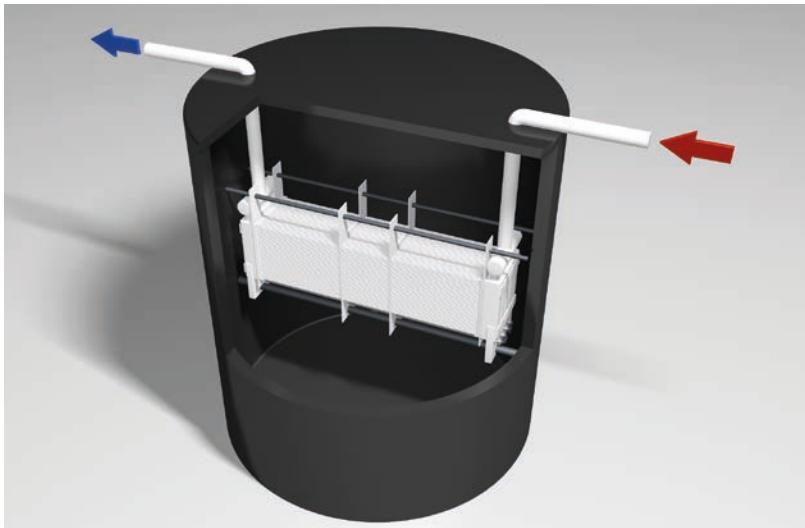

COOLING/HEATING/ CONDENSING

- Heating and cooling of corrosive or deposit containing fluids and high concentrated organic acids in open tanks
- Heating, cooling, condensing or evaporation of corrosive media in vessels
- Customized design from modular, pre-manufactured tube sections
- 1 to >500 m² heat transfer surface
- For use with water, steam or cooling aid

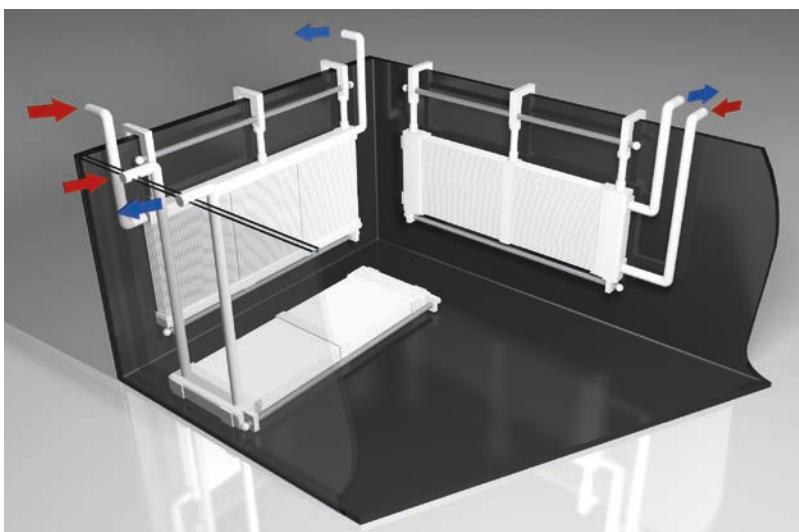

TECHNICAL DATA

Materials	PE-RT, PP, PVDF
Operation temperatures	-30 to +140 °C -22 to +285 °F (depending on the material chosen)
Operation pressure	3 to 16 bar (depending on the material chosen and the operation temperature)
Pressure drop	50 - 500 mbar (approx.)

BENEFITS

- High cooling and heating efficiency
- Flexible and compact design
- Fully corrosion resistant
- Safe heat transfer medium
- Best in class flow efficiency
- Easy maintenance and cleaning
- 30 years of experience



Installed Immersion type Heat-Exchanger in surface treatment installation (Decker Anlagebau GmbH)



CALORPLAST Wärmetechnik GmbH

Siempelkampstraße 94 · 47803 Krefeld · Germany
Phone: +49 (0)2151-8777-0 · E-Mail: info@calorplast.de